

THE ULTRA.



4M ULTRA TRI-AXLE Drop Deck Widener

THE ULTIMATE TRI-AXLE WIDENER


Standard Features

Payload	31t at full width	Rear Ramps	Heavy-duty chain actuated bi-fold ramps; 4200mm x 900mm box tube with a 5mm 700 grade steel plate surface and welded grip strips
ATM	44,000 kg	Upper Ramps	Aluminium 3-piece flip-over
GTM	27,000 kg	Paint	Fully sandblasted, primed, and finished in two high quality 2-pack paint, with a choice of colours
Deck Width	2.5m – 4m	Suspension	Fuwa K Hitch heavy-duty tri-axle suspension with 19.5" 8 stub hubs
Deck Height	0.995m	Hydraulics	Dual acting heavy-duty 3" cylinders fit with premium valves and 12V power pack
Deck Lengths	13.4m (45ft model), 13.7m (46ft model), 14.3m (48ft model)	Landing Gear	2 Speed Fuwa K Hitch landing legs
Overall Lengths	13.73m (45ft road train compliant), 14.08m (46ft model), 14.63m (48ft model); custom lengths available on request	Wheels	Steel painted rims with 265/70 19.5" tyres
Main Rails	350 grade webs and flanges; 25mm lower flange, 16mm upper flange	Electrics	175A Anderson plug, 12V lead acid battery, multi-volt LED lighting with beacon
Coaming Rails	250mm and 125mm PFC with 18 chain bars	Toolbox	Powder coated lockable toolbox with stainless door (1200mm x 350mm x 400mm)
Flooring	5mm 700G on decks and ramps with 31 in-deck tie down points	Water Tank	Polished 60L aluminium water tank
Chain Points	31 in-deck tie down points; 18 coaming chain bars	Oversize Signage	Custom spring-loaded flip-over signs
Tyre Carrier	Tyre carrier suited for 19.5" spares	Flag Holders	Front and rear flag holders
Front Gate	1600mm high heavy-duty gate		

4M ULTRA TRI-AXLE Drop Deck Widener

Rated to carry a 31t payload at full width[^]

BRIMARCO

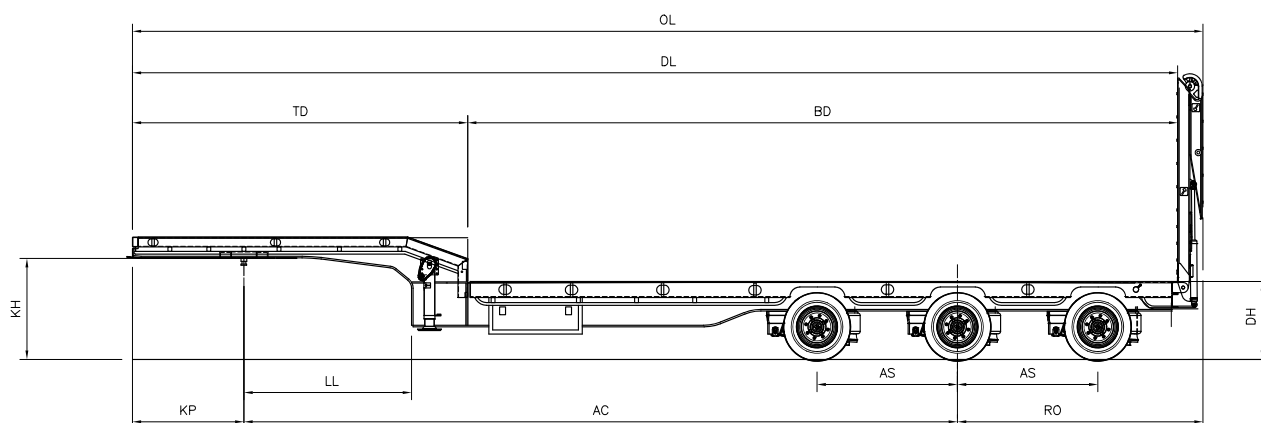

	Length		Deck			Other					
Model	OL	DL	TD*	BD	DH	KH	KP	LL	AC	AS	RO
Road Train											
IR	13.73 (45ft)	13.4	4.3	9.1	0.995	1.27	1.43	2.15	9.15	1.8	3.15
Standard											
IA	14.08 (46ft)	13.7	4.3	9.4	0.995	1.27	1.43	2.15	9.15	1.8	3.15
Maximum											
IM	14.63 (48ft)	14.3	4.3	10	0.995	1.27	1.43	2.15	9.15	1.8	3.7

Legend

OL Overall Length	LL Landing Leg	BD Bottom Deck	RO Rear Overhang
KP Kingpin Centre	TD Top Deck	AS Axle Spacing	KH Kingpin Height
DL Deck Length	AC Axle Centreline	DH Deck Height	

Note: All dimensions are listed in metres (m)

^{*}Top deck length includes flip over ramp in position shown. For custom lengths or other special requirements please contact Brimarco directly. ^{*}Payload refers to engineered structural capacity. On-road limits depend on local regulations and vehicle configuration. ^{*}DISCLAIMER: 5 Year Warranty applies to structural defects only.

Optional Features

- + Roadtrain provision and coupling
- + Customised deck tie-down layouts
- + Extra wide ramps
- + Customised lighting and electrical systems
- + Petrol, diesel or PTO hydraulic systems
- + Hub-odometers, RightWeigh gauge, and telematic systems
- + Alloy and spare wheels
- + 3-way container pins
- + Stainless coaming rail protectors and vinyl scrollwork
- + Electric winch
- + Custom deck lengths

BRIMARCO

Engineered **Strength.**
Built **Together.**

(03) 5339 1000

17-19 Coronet Street, Wendouree VIC 3355
sales@brimarco.com.au



View Online

Full specs, features,
videos and more at:
brimarco.com.au

